

Technical Data User Interface UI400 for CMS



Fig. 1 Figure UI400

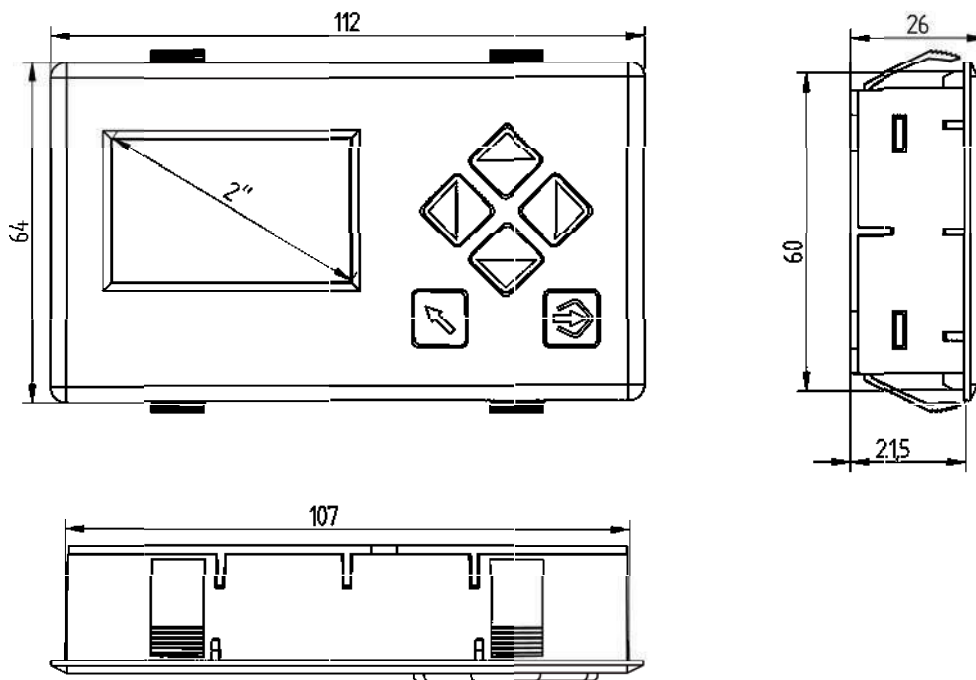


Fig. 2 Dimensional drawing UI400

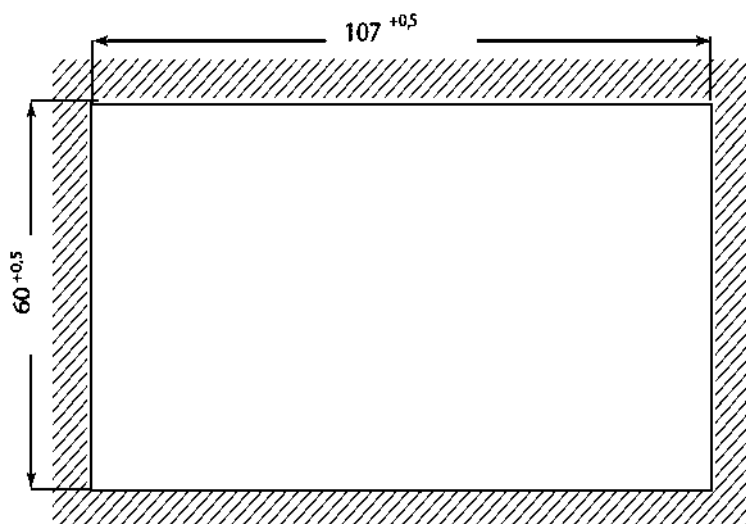


Fig. 3 Panel cutout UI400

Technical Data User Interface UI400 for CMS

Technical Data UI400

Display	128 x 64 pixels, monochrome white backlight (dimmbable)
Dimensions (H × W × D)	64 × 112 × 26 mm 2.52 x 4.41 x 1.02" in
Weight	0.149 kg 0.33 lb
Power supply voltage	Via LSB
Power consumption	1 W
Flammability	UL-94 V0
Cable length	2.5 m 98.42" in

Environmental Conditions

Operation	permitted temperature range	-30 ... +70 °C -22 ... +158 °F (condensation prohibited)	
	permitted humidity	5 ... 95 % relative humidity	
Transport/Storage	permitted temperature range	-40 ... +80 °C -40 ... +176 °F (condensation prohibited)	
	permitted humidity	5 ... 95 % relative humidity	
Degree of protection	DIN EN 60529	front	IP40
			IP65 (with additional cover)

EU Declaration of Conformity

2014/35/EU	Low Voltage Directive
2014/30/EU	EMC Directive
2014/68/EU	Pressure Equipment Directive Kat. 4 Mod. B+D
(EU) 2016/426	Gas Appliance Regulation (GAR)
2011/65/EU	RoHS

NOTICE

The limits of the technical data must be strictly adhered to.