


**GasMultiBloc®**  
**Combined regulator and**  
**safety shut-off valves**  
**Single-stage function**

**MB-D(LE) 415 - 420 B01**

**DUNGS®**  
Combustion Controls

7.23

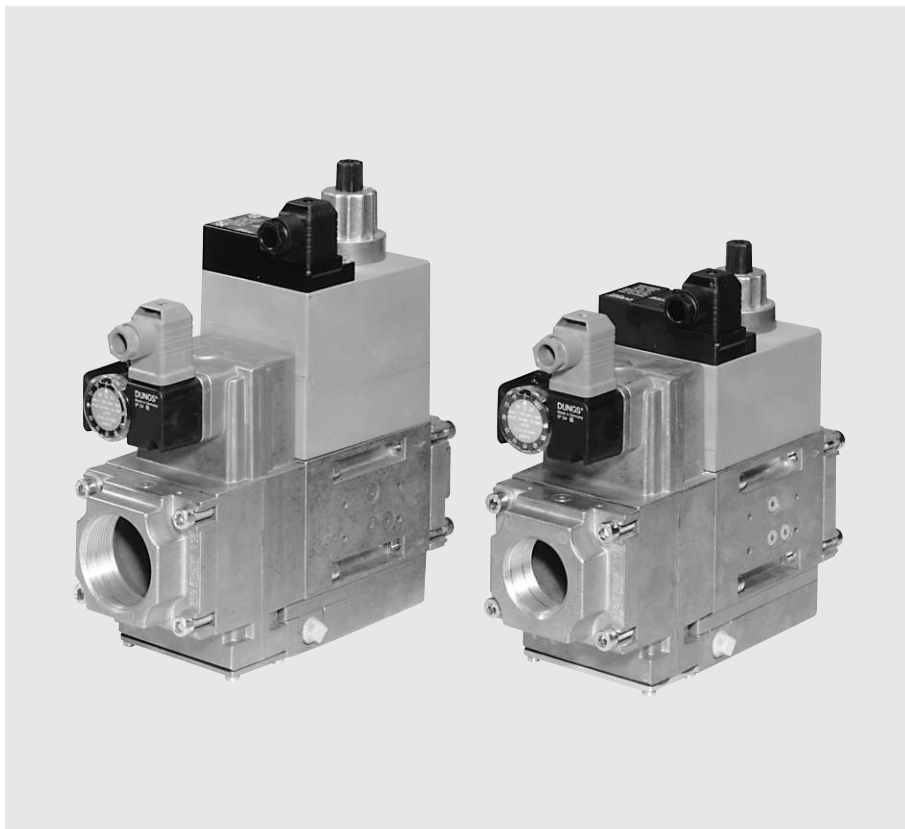

**Technical description**

The DUNGS GasMultiBloc® integrates filter, regulator, valves and pressure switches in one compact fitting.

- Dirt trap: microfilter
- One regulator and two valves: B01
- Two valves are fast opening
- One valve is fast opening and one valve is slow opening
- Solenoid valves up to 360 mbar (36 kPa) as per DIN EN 161 Class A Group 2
- Sensitive setting of output pressure by proportional regulator as per DIN EN 88 Class A Group 2
- High flow rates with low pressure drop
- DC solenoid drive interference degree N
- Main volume restrictor at valve V2
- Hydraulic opening delay
- Flange connections with pipe threads as per ISO 7/1
- Simple mounting, compact, light-weight

The modular system permits individual solutions by using external ignition gas tap in connection with separately controlled valves, by adding a valve proving system, mini/maxi pressure switches, pressure limiters, limit switch at valve V2.

**Application**

The modular system permits individual solutions in gas safety and regulator engineering. Suitable for gases of families 1, 2, 3 and other neutral gaseous media.

**Approvals**

EC type testing certificate as per:

- EC-Gas Appliances Regulation
  - EC-Pressure Equipment Directive
- Approvals in other important gas consuming countries.

## Functional description of gas flow

1. When the valves V1 and V2 are closed, chamber A is under inlet pressure.
2. A hole D in the filter housing connects min. pressure switch with chamber A. If the inlet pressure applied to the pressure switch exceeds the incoming reference value, it switches through to the automatic burner control.
3. After release by the automatic burner control, valves V1 and V2 open. The gas flows through chambers A, B and C of the GasMultiBloc.

## Operating method of valve-regulator combination on valve V1

A regulator, compensating for residual pressure is integrated in valve V1 (pressure regulating part). Armature 7 is not connected with valve plate unit 3. When it opens, armature 8 pretensions compression spring (V1) 5 and releases the valve plate unit.

When the valve closes, the armature acts directly on the valve plate unit.

The output pressure upstream of valve V2 is defined by pretensioning regulating spring 8 (tension spring) via setting screw 17.

The output pressure acts via opening E on the working diaphragm 21 of the regulator part. In regulated state, setting spring inlet pressure and pressure of working diaphragm are in force equilibrium.

The compensating diaphragm 22 ensures the fast closing function of valve V1 and a high regulating quality.

## Operating method of valve V2

The armature 14 of valve V2 is connected to valve plate unit 12. When it opens, armature 14 pretensions the closing spring 13. The max. valve opening can be set by limiting the armature stroke by means of the main volume restrictor 18.


## Min. opening (residual stroke) of valve (0.5 to 1.0 mm)

The main volume restrictor 18 is set by rotating the adjusting plate or the hydraulic brake 20. The fast and/or slow opening characteristic is influenced by setting fast stroke 19 at the hydraulic brake under the cover.

## Closing function

When the supply voltage to the solenoid coils of valves V1 and V2 is interrupted, they are closed within < 1 s by the compression springs.

## Sectional drawing of MB-DLE...

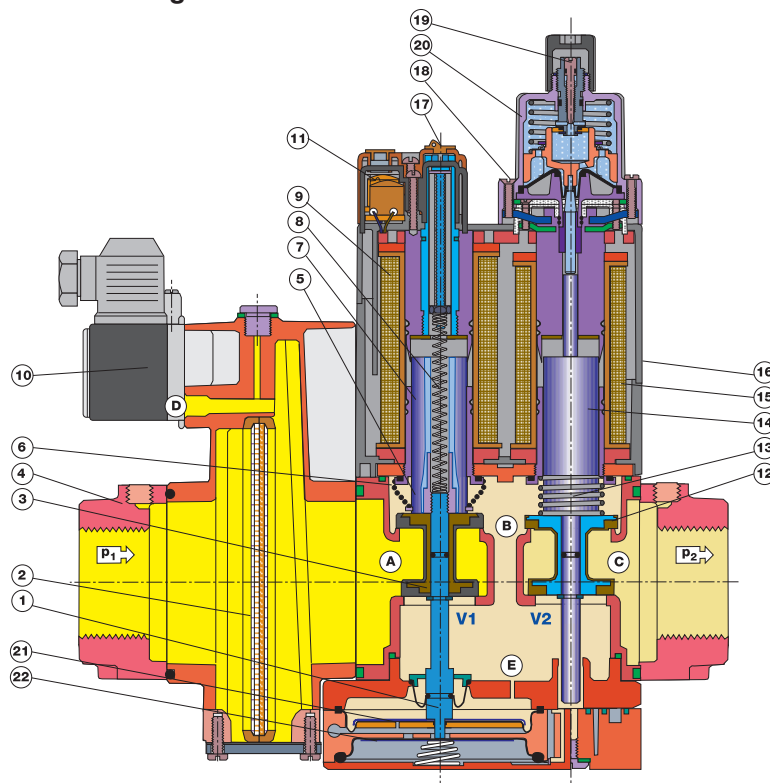


- |   |                    |    |                       |
|---|--------------------|----|-----------------------|
| 1 | Pressure regulator | 9  | Solenoid V1           |
| 2 | Microfilter        | 10 | Gas pressure switch   |
| 3 | Valve V1           | 11 | Electrical connection |
| 4 | Connection flange  | 12 | Valve V2              |
| 5 | Closing spring V1  | 13 | Closing spring V2     |
| 6 | Housing            | 14 | Armature V2           |
| 7 | Armature V1        | 15 | Solenoid V2           |
| 8 | Regulating spring  | 16 | Solenoid housing      |


### Setting:

- |    |                        |
|----|------------------------|
| 17 | - Gas pressure $p_a$   |
| 18 | - Main volume          |
| 19 | - Fast stroke          |
| 20 | Hydraulic brake        |
| 21 | Working diaphragm      |
| 22 | Compensation diaphragm |

## Pressure taps


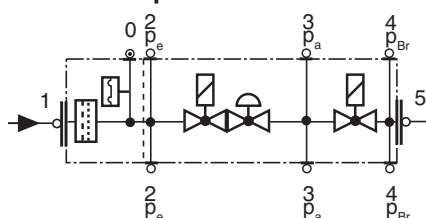


0, 1, 2, 3, 4, 5  
screw plug G 1/8


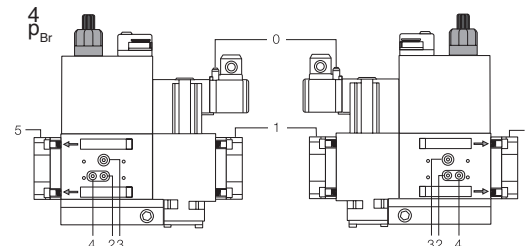


## Electrical connection

S 20/S 50

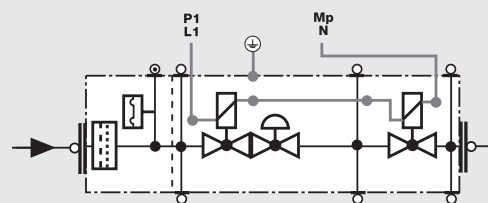

S 22/S 52

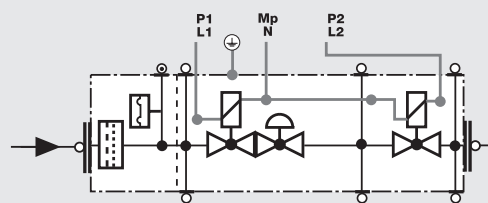

## Specifications

|                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------|-----------------|--|------------------------|----|--------------|--------------|---------|------|--------------|--------------|------|--------|--------------|----------------|------|-------|--------------|----------------|---------|
| Nominal diameters<br>Flange with pipe threads as per<br>ISO 7/1 (DIN 2999)                     | MB-D... 415 B01<br>Rp 1, 1 1/4, 1 1/2, 2<br>and their combinations                                                                                                                                                                                                                                                                                                                                                                  | MB-D... 420 B01<br>Rp 1, 1 1/4, 1 1/2, 2<br>and their combinations                        |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Max. operating pressure                                                                        | 360 mbar (36 kPa)                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Output pressure ranges                                                                         | MB-... S20/S22 p <sub>a</sub> : 4 mbar (0.4 kPa) to 20 mbar (2 kPa)<br>MB-... S50/S52 p <sub>a</sub> : 20 mbar (2 kPa) to 50 mbar (5 kPa)                                                                                                                                                                                                                                                                                           |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Media                                                                                          | Gases of families 1, 2, 3 and other neutral gaseous media                                                                                                                                                                                                                                                                                                                                                                           |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Ambient temperature                                                                            | -15 °C to +70 °C (Do not operate MB-D below 0 °C in liquid gas systems.<br>Only suitable for gaseous liquid gas, liquid hydrocarbons destroy sealing ma-<br>terials.)                                                                                                                                                                                                                                                               |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Dirt trap                                                                                      | Sieve, microfilter, changing the filter is possible without removing the valve.                                                                                                                                                                                                                                                                                                                                                     |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Pressure switches                                                                              | Types GW...A5, ÜB...A2 / NB...A2 to DIN EN 1854 may be attached.<br>For further information, refer to Datasheets 5.02 and 5.07 "Pressure Switches<br>for DUNGS Multiple Actuators"                                                                                                                                                                                                                                                  |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Pressure regulator                                                                             | Pressure regulator compensated for residual pressure, leakproof seal when<br>switched off by means of valve V1 as per DIN EN 88 Class A.<br>Setpoint spring permanently installed (no spring exchange possible). A vent line<br>above roof is not required. Internal pulse tap provided.                                                                                                                                            |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Solenoid valve V1                                                                              | Valve as per DIN EN 161 Class A Group 2, fast closing, fast opening                                                                                                                                                                                                                                                                                                                                                                 |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Solenoid valve V2                                                                              | Valve as per DIN EN 161 Class A Group 2                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
|                                                                                                | <table><tr><td></td><td colspan="2">Valve V2 design</td><td>Main volume restrictor</td></tr><tr><td>MB</td><td>fast closing</td><td>fast opening</td><td>without</td></tr><tr><td>MB-D</td><td>fast closing</td><td>fast opening</td><td>with</td></tr><tr><td>MB-DLE</td><td>fast closing</td><td>slowly opening</td><td>with</td></tr><tr><td>MB-LE</td><td>fast closing</td><td>slowly opening</td><td>without</td></tr></table> |                                                                                           |                        | Valve V2 design |  | Main volume restrictor | MB | fast closing | fast opening | without | MB-D | fast closing | fast opening | with | MB-DLE | fast closing | slowly opening | with | MB-LE | fast closing | slowly opening | without |
|                                                                                                | Valve V2 design                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                           | Main volume restrictor |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| MB                                                                                             | fast closing                                                                                                                                                                                                                                                                                                                                                                                                                        | fast opening                                                                              | without                |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| MB-D                                                                                           | fast closing                                                                                                                                                                                                                                                                                                                                                                                                                        | fast opening                                                                              | with                   |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| MB-DLE                                                                                         | fast closing                                                                                                                                                                                                                                                                                                                                                                                                                        | slowly opening                                                                            | with                   |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| MB-LE                                                                                          | fast closing                                                                                                                                                                                                                                                                                                                                                                                                                        | slowly opening                                                                            | without                |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Measuring / Ignition gas connection                                                            | For G 1/8 as per DIN ISO 228, refer to Pressure taps on page 2                                                                                                                                                                                                                                                                                                                                                                      |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Burner pressure monitor p <sub>Br</sub>                                                        | Connection downstream of valve V2, pressure switch mountable on adapter laterally                                                                                                                                                                                                                                                                                                                                                   |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Voltage / Frequency                                                                            | 50 - 60 Hz 220 - 230 V AC -15 % +10 %<br>Other preferred voltages: 240 VAC, 110 - 120 VAC, 48 VDC, 24 - 28 VDC                                                                                                                                                                                                                                                                                                                      |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Electrical connection                                                                          | Plug connection as per DIN EN 175301-803<br>for valves and pressure switches                                                                                                                                                                                                                                                                                                                                                        |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Rating / Power consumption<br>Switch-on duration<br>Degree of protection<br>Radio interference | at 230 V AC; +20 °C: refer to Dimensions on page 5<br>100%<br>IP 54 as per IEC 529 (EN 60529)<br>Interference degree N                                                                                                                                                                                                                                                                                                              |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Materials of gas conveying parts                                                               | Housing<br>Diaphragms, seals<br>Solenoid drive                                                                                                                                                                                                                                                                                                                                                                                      | aluminium die casting<br>NBR basis, Silopren (silicone rubber)<br>steel, brass, aluminium |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Installation position                                                                          | Solenoid vertically upright or lying horizontally as well as its intermediate posi-<br>tions.                                                                                                                                                                                                                                                                                                                                       |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |
| Closed position signal contact                                                                 | Closed position signal contact, type K01/1 (DIN-tested), mountable on V2                                                                                                                                                                                                                                                                                                                                                            |                                                                                           |                        |                 |  |                        |    |              |              |         |      |              |              |      |        |              |                |      |       |              |                |         |

| Equipment variants<br>GasMultiBloc®...B01<br>Single-stage function | 415 B01 | 420 B01 |  |
|--------------------------------------------------------------------|---------|---------|--|
| MB                                                                 | •       | •       |  |
| MB-D                                                               | •       | •       |  |
| MB-DLE                                                             | •       | •       |  |
| MB-LE                                                              | •       | •       |  |
| Microfilter                                                        | •       | •       |  |
| Gas pressure switch<br>downstream of filter                        | •       | •       |  |
| downstream of valve V2 on adapter                                  | •       | •       |  |
| Pressure regulator                                                 | •       | •       |  |
| Valve V1, double seat                                              | •       | •       |  |
| Valve V2, double seat                                              | •       | •       |  |
| Valves opening together                                            | •       | •       |  |
| Valves opening separately                                          | •       | •       |  |
| Flange Rp 1                                                        | •       | •       |  |
| Rp 1 1/4                                                           | •       | •       |  |
| Rp 1 1/2                                                           | •       | •       |  |
| Rp 2                                                               | •       | •       |  |

Filter element can be removed. A suitable GF.../1 gas filter must then be fitted upstream.

• = possible  
(•) = on request  
- = not possible

**MB-...B01 version**

- V1


= Valve 1
- V2

= Valve 2
- 3

= Filter
- 4

= Pressure switch, optional
- 5

= Regulator

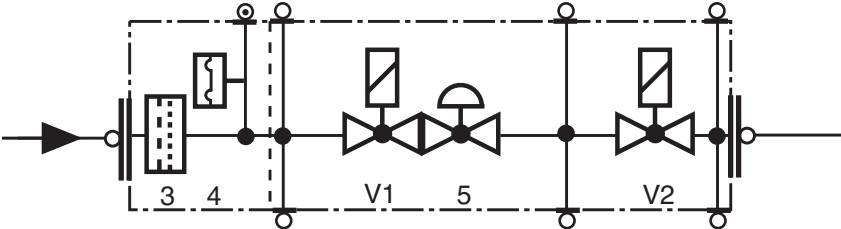

Mounting of VPS 504 valve proving system possible

Mounting of K01/1 closed position signal contact possible

For further information, refer to Datasheet 7.04: GasMultiBloc Modular System, Accessories, Additional equipment

**Type key of MultiBloc®**

MB-

XX

XXX

XX

BOX

SXX

Control of V1 and V2

0 = common

2 = separated

Outlet pressure

2 = 4 - 20 mbar

5 = 20 - 50 mbar

Inlet pressure

up to 360 mbar

up to 360 mbar

S = Series (type-independent)

Gas train schematic diagram

1 = two A valves for main gas + regulator

7 = two A valves for main gas, one A valve together with V1 as internal bypass around V2 + regulator

Design type (generation) B

Construction size, nominal diameter

403 = DN 10, V2 = Single-seat valve

405 = DN 15, V2 = Single-seat valve

407 = DN 20, V2 = Double-seat valve

410 = DN 25, V2 = Single-seat valve

412 = DN 32, V2 = Double-seat valve

415 = DN 40, V2 = Double-seat valve

420 = DN 50, V2 = Double-seat valve

Opening behaviour + main volume restrictor

without = (MB or MB-ZR)

-D = Main volume restrictor

-LE = adjustable opening behaviour


-DLE = D + LE combination

without = single stage

ZR = double-stage with partial volume setting first stage

MultiBloc

## Dimensions [mm]

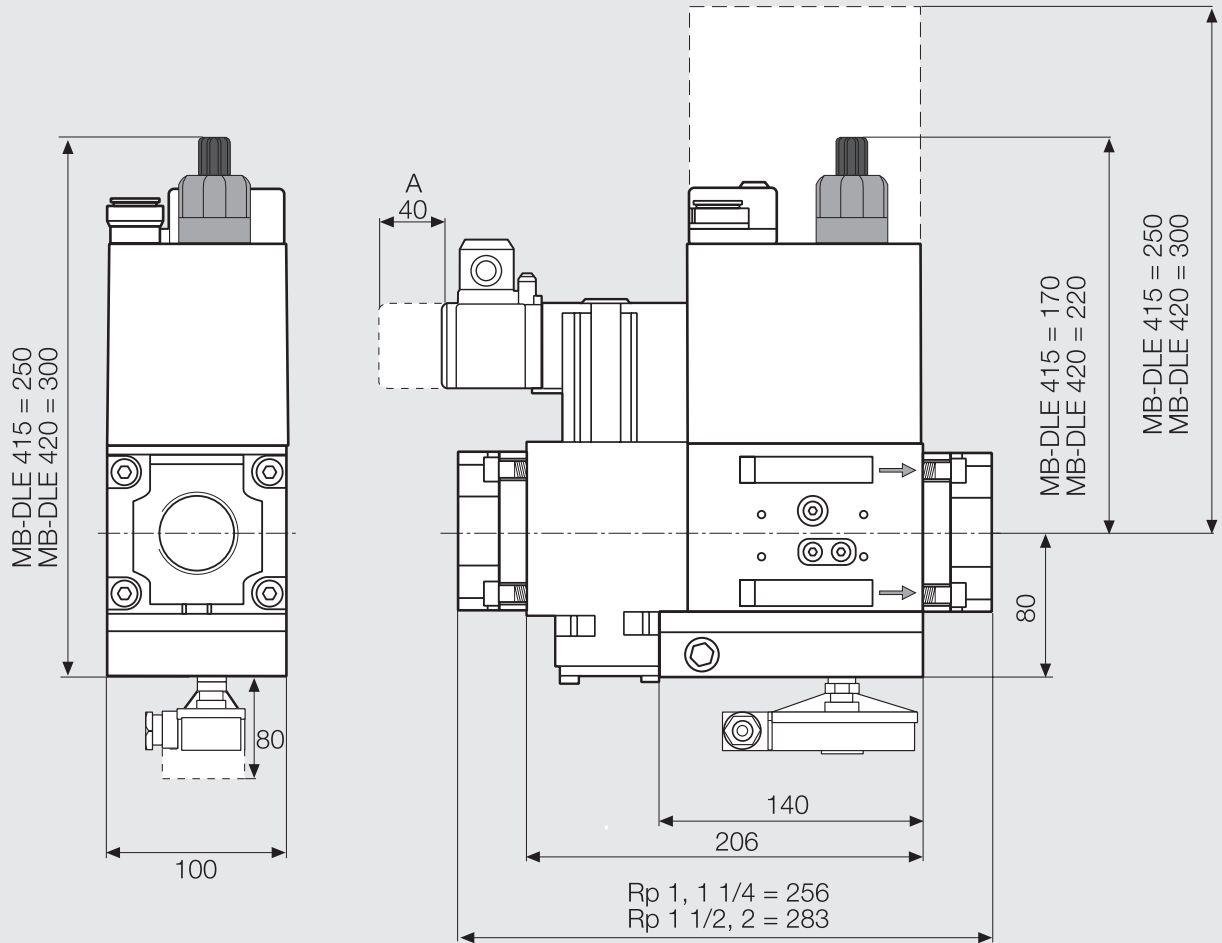


| Type                  | Rp       | Opening time | Nominal rating[VA]<br>~(AC) 230 V AC; +20°C |     |     |     | Weight [kg] |
|-----------------------|----------|--------------|---------------------------------------------|-----|-----|-----|-------------|
|                       |          |              | S20                                         | S22 | S50 | S52 |             |
| <b>MB-D 415 B01</b>   | Rp 1 - 2 | < 1 s        | 55                                          | 96  | 55  | 96  | 6.5         |
| <b>MB-DLE 415 B01</b> | Rp 1 - 2 | < 20 s       | 55                                          | 96  | 55  | 96  | 6.6         |
| <b>MB-D 420 B01</b>   | Rp 1 - 2 | < 1 s        | 80                                          | 100 | 80  | 100 | 7.7         |
| <b>MB-DLE 420 B01</b> | Rp 1 - 2 | < 20 s       | 80                                          | 100 | 80  | 100 | 7.8         |

**GasMultiBloc®**  
**Combined regulator and safety**  
**shut-off valves**  
**Single-stage function**

**MB-D(LE) 415 - 420 B01**

**DUNGS®**  
**Combustion Controls**

**Volumetric flow pressure loss characteristics in regulated state with microfilter**

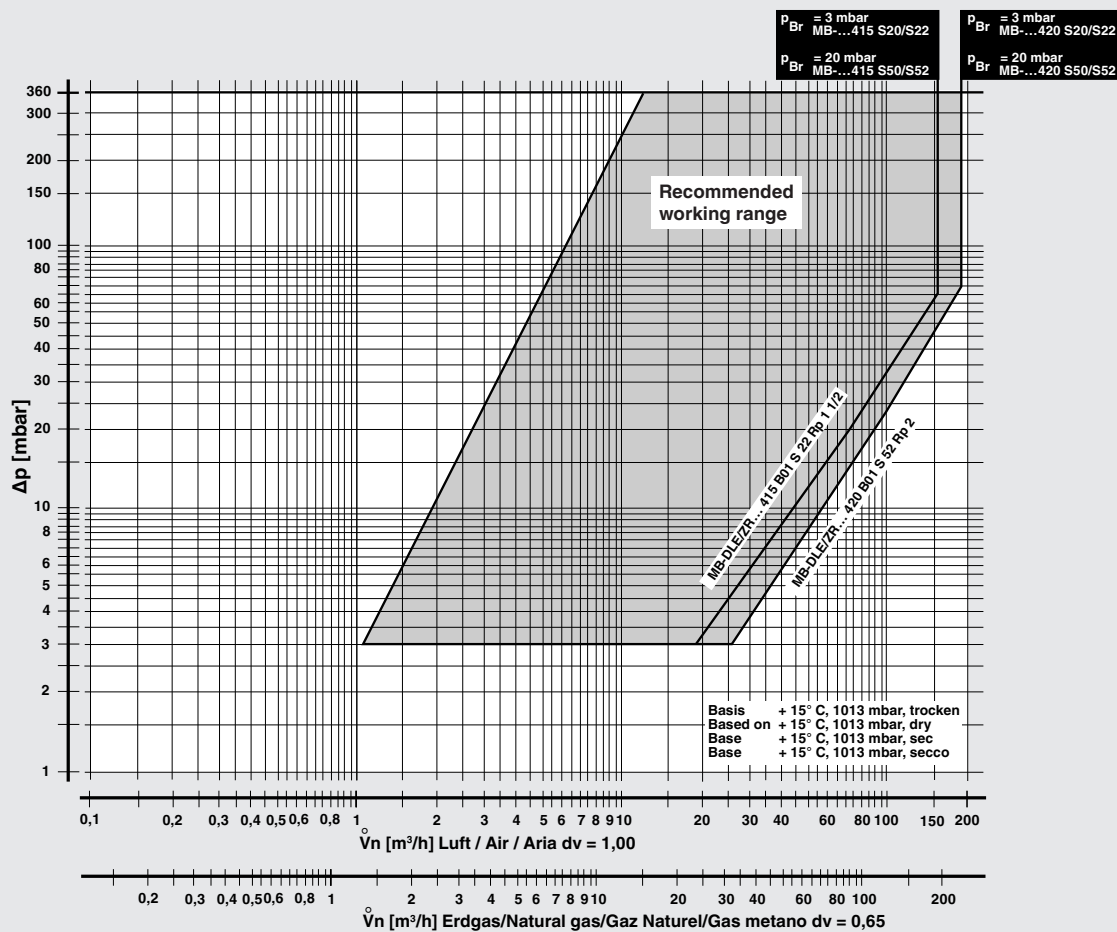

$f =$

Dichte Luft  
 Spec. weight air  
 poids spécifique de l'air  
 peso específico aria

Dichte des verwendeten Gases  
 Spec. weight of gas used  
 poids spécifique du gaz utilisé  
 peso específico del gas utilizzato

| Gas type | Density [kg/m³] | dv   | f    |
|----------|-----------------|------|------|
| Nat. gas | 0.81            | 0.65 | 1.24 |
| City gas | 0.58            | 0.47 | 1.46 |
| LPG      | 2.08            | 1.67 | 0.77 |
| Air      | 1.24            | 1.00 | 1.00 |

$$\dot{V}_{\text{verwendetes Gas/gas used/ gaz utilisé/gas utilizzato}} = \dot{V}_{\text{Luft/air/air/aria}} \times f$$

We reserve the right to make any changes in the interest of technical progress.

**Head Offices and Factory**  
**Karl Dungs GmbH & Co. KG**  
**Karl-Dungs-Platz 1**  
**D-73660 Urbach, Germany**  
**Telephone +49 (0)7181-804-0**  
**Fax +49 (0)7181-804-166**

**Postal address**  
**Karl Dungs GmbH & Co. KG**  
**Postfach 12 29**  
**D-73602 Schorndorf, Germany**  
**e-mail info@dungs.com**  
**Internet www.dungs.com**